




Key Features

CMOS Sensor
1080P CVI/AHD/TVI/CVBS
5-50mm Manual VF lens
6PCS 3rd Generation LEDs
IR Distance 60-80M
Waterproof IP66
DC12V

Dimension

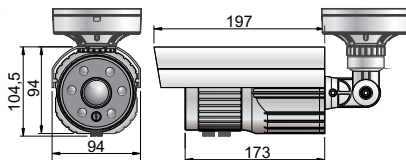


Specification

4 IN 1 CAMERA	
Image Sensor	2 Megapixels CMOS Sensor
Effective Pixels	1920(H) X 1080(V)
Resolution	2Mp/1080P
Signal System	PAL/NTSC
Minimum Illumination	0Lux(IR LED ON)
S/N Ratio	>50dB(AGC Off)
White Balance	AUTO
Wide Dynamic Range	D-WDR
Day/Night	IR Cut Filter Switch
Video Output	CVI, AHD, TVI, CVBS, Seletable
Frame Rate	1920X1080@25fps, 1920X1080@30fps
Noise Reduction	2D/3D DNR
Power Supply	DC 12V±10%
Operating Temperature	-20℃—+50℃
Operating Humidity	less than 95%RH (Without condensation)

Specifications are subject to change without prior notice !


Please follow the instruction from the marking" ✓ "

☒ Output Single Switching Mode 1




Push the button to the selected direction
hold for 5 seconds.



☐ Output Single Switching Mode 2




Long-press the "menu" button
Output signal would switch in cycle



☐ Output Single Switching Mode 3



☒ UTC Function via DVR




- (1) Up/Left/Down/Right
- (2) Ok/Enter
- (3) Focus (Motorized Lens)
- (4) Zoom Operation



Key Features

CMOS Sensor
1080P CVI/AHD/TVI/CVBS
5-50mm Manual VF lens
6PCS 3rd Generation LEDs
IR Distance 60-80M
Waterproof IP66
DC12V

Dimension

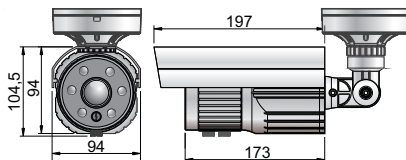


Specification

4 IN 1 CAMERA	
Image Sensor	2 Megapixels CMOS Sensor
Effective Pixels	1920(H) X 1080(V)
Resolution	2Mp/1080P
Signal System	PAL/NTSC
Minimum Illumination	0Lux(IR LED ON)
S/N Ratio	>50dB(AGC Off)
White Balance	AUTO
Wide Dynamic Range	D-WDR
Day/Night	IR Cut Filter Switch
Video Output	CVI, AHD, TVI, CVBS, Seletable
Frame Rate	1920X1080@25fps, 1920X1080@30fps
Noise Reduction	2D/3D DNR
Power Supply	DC 12V±10%
Operating Temperature	-20℃—+50℃
Operating Humidity	less than 95%RH (Without condensation)

Specifications are subject to change without prior notice !


Please follow the instruction from the marking" ✓ "

☐ Output Single Switching Mode 1




Push the button to the selected direction
hold for 5 seconds.



☒ Output Single Switching Mode 2




Long-press the "menu" button
Output signal would switch in cycle



☐ Output Single Switching Mode 3



☒ UTC Function via DVR




(1)Up/Left/Down/Right
(2)Ok/Enter
(3)Focus (Motorized Lens)
(4)Zoom Operation



Key Features

CMOS Sensor
1080P CVI/AHD/TVI/CVBS
5-50mm Manual VF lens
6PCS 3rd Generation LEDs
IR Distance 60-80M
Waterproof IP66
DC12V

Dimension

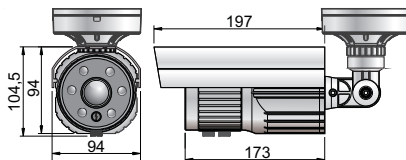


Specification

	4 IN 1 CAMERA
Image Sensor	2 Megapixels CMOS Sensor
Effective Pixels	1920(H) X 1080(V)
Resolution	2Mp/1080P
Signal System	PAL/NTSC
Minimum Illumination	0Lux(IR LED ON)
S/N Ratio	>50dB(AGC Off)
White Balance	AUTO
Wide Dynamic Range	D-WDR
Day/Night	IR Cut Filter Switch
Video Output	CVI, AHD, TVI, CVBS, Seletable
Frame Rate	1920X1080@25fps, 1920X1080@30fps
Noise Reduction	2D/3D DNR
Power Supply	DC 12V±10%
Operating Temperature	-20℃—+50℃
Operating Humidity	less than 95%RH (Without condensation)

Specifications are subject to change without prior notice !


Please follow the instruction from the marking" ✓ "

☐ Output Single Switching Mode 1




Push the button to the selected direction
hold for 5 seconds.



☐ Output Single Switching Mode 2




Long-press the "menu" button
Output signal would switch in cycle



☒ Output Single Switching Mode 3



☒ UTC Function via DVR



- (1) Up/Left/Down/Right
- (2) Ok/Enter
- (3) Focus (Motorized Lens)
- (4) Zoom Operation